

PHOS 20 LT LED PROJECTOR



SPECIFICATIONS


| | |
|---|----------------------------------|
| item: | PHOS 20 LT |
| body: | aluminium |
| available colours: | silver / black / white |
| weight: | 2.8 kg |
| on / off switch: | not available |
| environmental conditions: | for dry interiors only |
| pivot range: | approx. 320° vertical |
| cooling: | passive, noiseless |
| light source: | 20 W High-Power LED |
| recommended projection distance in normal room light: | 10 ft |
| recommended projection distance in darkness: | 26 ft |
| average lifetime of the LED: | 35,000 operating hours |
| colour temperature: | 6,500 - 8,000° Kelvin |
| luminous flux of the LED: | 1,700 lumens |
| gobo size / image size: | Ø 50 mm / Ø 35 mm |
| voltage: | 100 - 240 V AC / 50 - 60 Hz |
| active power (power consumption): | 27 W |
| apparent power: | 59 VA |
| efficiency: | 0.46 cos. φ |
| electrical protection: | protection class I |
| ingress protection rating: | IP 20 |
| photobiological safety: | IEC62471:2006 EN62471:2008: RG-2 |
| item number: | |
| silver: | 20001430 |
| black: | 20001420 |
| white: | 20001410 |

COMPONENTS


Standard series with high power LED, 85 mm standard lens, adapter to mount the projector on a 3-phase lighting track. The machine is ready to plug in and run. Required accessories: glass gobo with individually designed motif.

We reserve the right to make technical and optical modifications. Our general terms and conditions apply.

PROJECTION DIAMETER WITH INCREASING DISTANCE

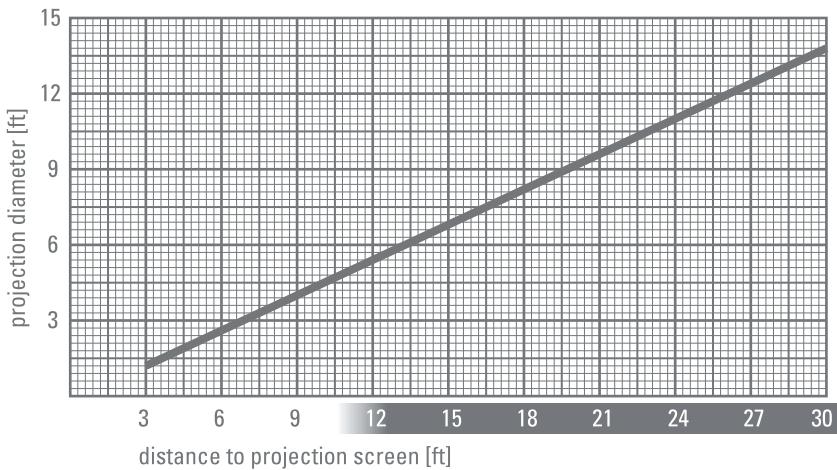

MEASUREMENTS

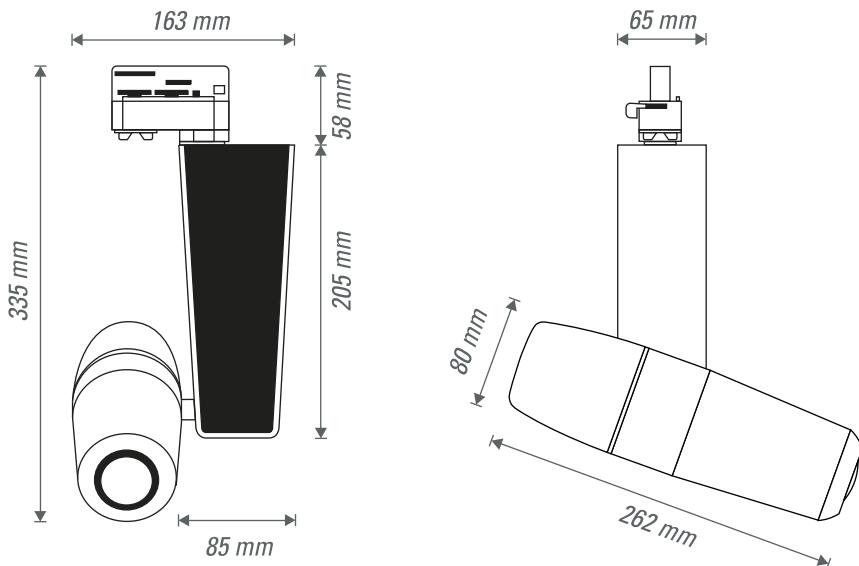

CE IP 20



derksen®
lichttechnik

DerkSEN Lichttechnik GmbH
Sauerlandstraße 5
45889 Gelsenkirchen
Germany

Phone: +49(0)209/98070-0
Fax: +49(0)209/98070-60

info@derksen.de
www.derksen.de